



INSTALLATION MANUAL
WALL TANKS

Learn how to:

- Install the wall tank to filter connection.
- Install the wall tank to wall tank connector (if connecting two tanks).
- Install the 3P filter.



WALL TANK TO FILTER CONNECTOR

THE TOOLS YOU NEED



- A Tape Measure
- B 26mm Drill Bit
(included)
- C Marker
- D Hacksaw
- E Drill

Fig 1.0

Fig 01. shows everything you will need to install the wall tank filter connector.

INSTALLATION

Using the tape measure and the marker, measure 75mm from the centre top of the tank and mark this on the tank. This will show you where you need to drill. We recommend 75mm to give you maximum water collection capability.



Fig 2.0

INSTALLATION

Connect the 26mm drill bit to your drill and drill the hole in the tank.

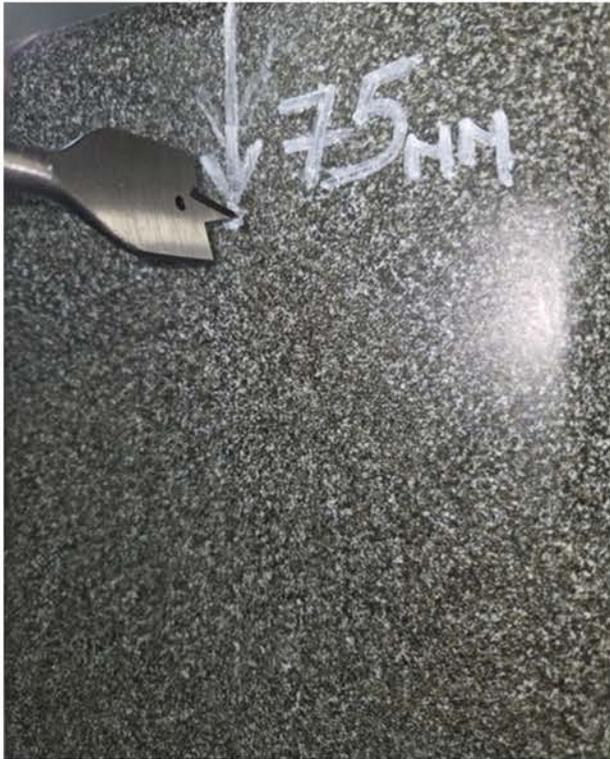


Fig 3.0

Your hole should now be ready for you to connect the wall tank filter connector pipe.



Fig 4.0

INSTALLATION

Push the wall tank filter connector into your drilled hole (using the enclosed schematic for reference). Reach into the tank via the lid, take the supplied plastic washer and connect this to the end of the wall tank filter connector.



Fig 5.0

WALL TANK TO WALL TANK FITTING INSTRUCTIONS

1. Remove the blanking cover at the bottom of your wall tank on the side you wish to link.



Blanking Cap

2. Take the ¾ to 1-inch threaded adaptor and wrap a small amount around the threaded ends.



3. Screw the male ¾-inch thread into the female ¾-inch thread on the tanks you are linking together.



4. Take your wall tank to wall tank connector pipe and screw the 1-inch female thread to the 1-inch male thread on each tank.



WALL TANK TO WALL TANK FITTING INSTRUCTIONS

4. You have now linked your new wall tanks together and they are ready to be filled.






3P FILTER INSTALL


THE TOOLS YOU NEED



WHAT'S IN THE BOX

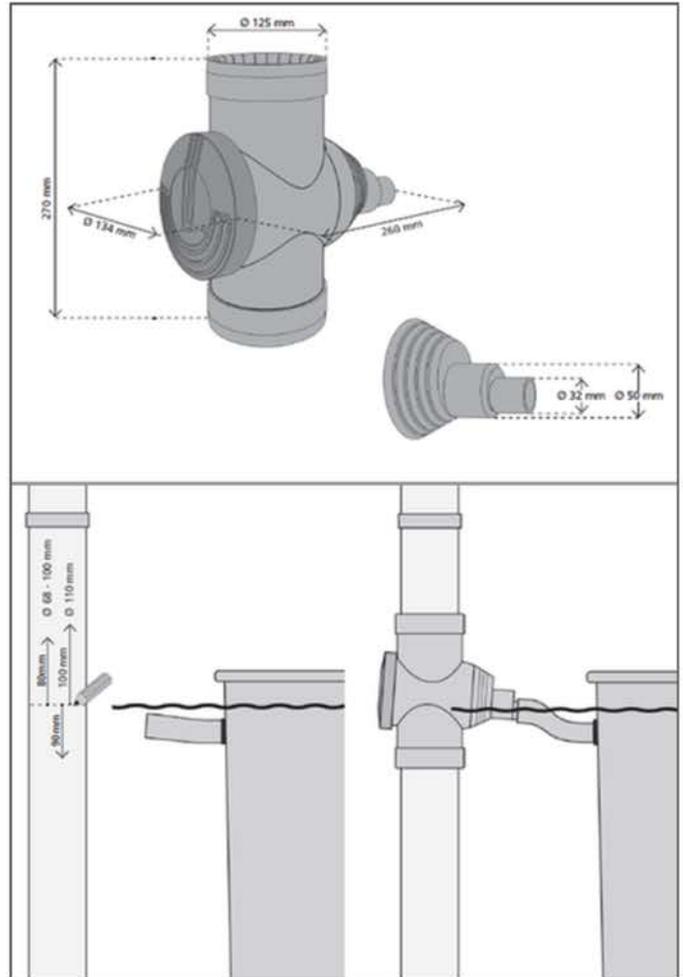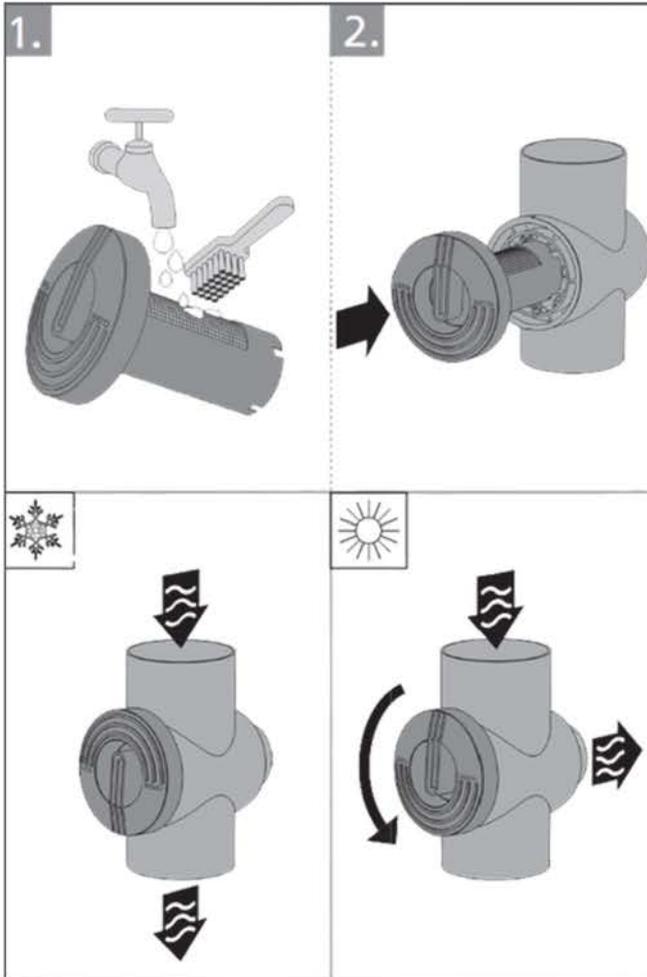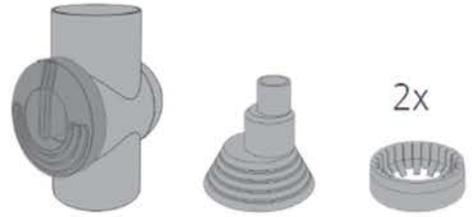

3P FILTER INSTALL

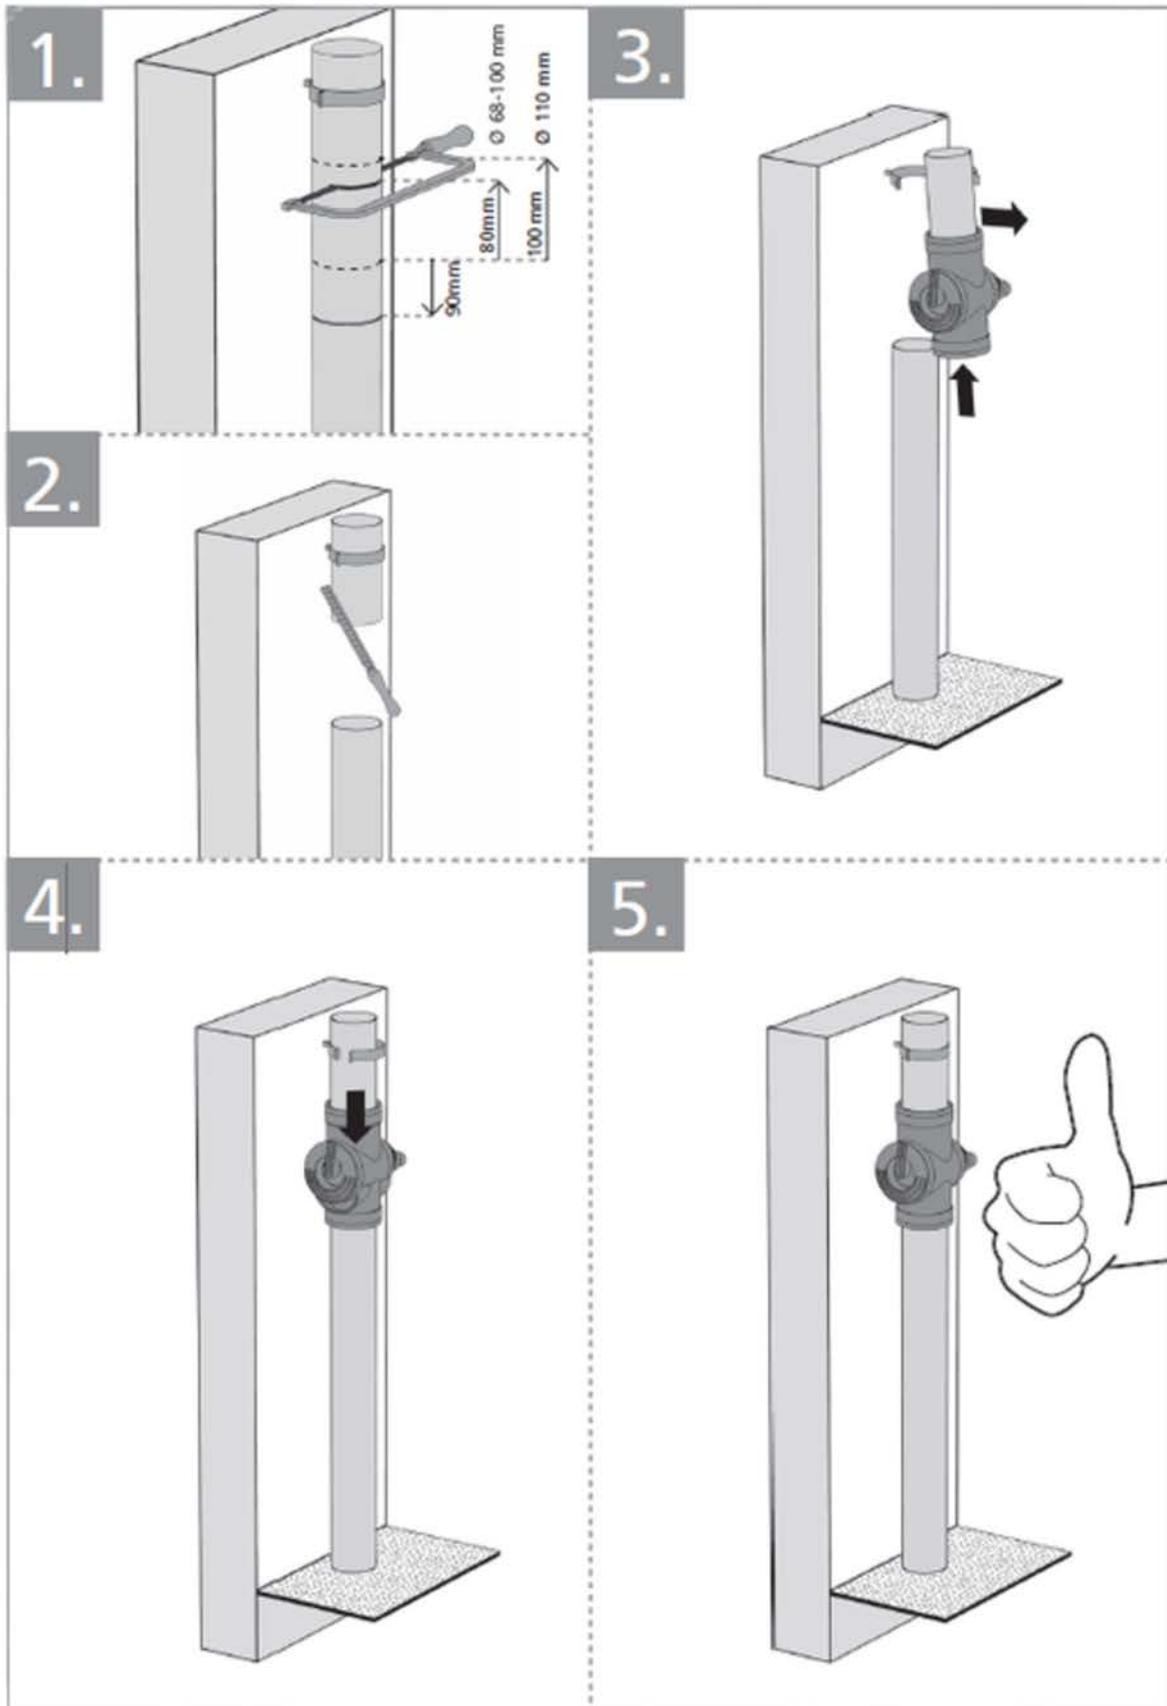

01733 405111

www.rainwaterharvesting.co.uk

support@rainwaterharvesting.co.uk